



GEARMAX AXLE 3000 XR 80W/90

API GL-5 / GL-4+ / GL-4

Doill Manual Transmission Oil

Transfer case and Gear Oil

Mineral

Usage

- Gear oil formulated for heavy-duty transmissions, axles and final drives that require API GL-5 performance.
- Used in other heavy-duty industrial and automotive applications of hypoid gears in high speed/impact load, high speed/low torque and/or low speed/high torque operating conditions.

Performance

Advantages of **Doill GEARMAX AXLE 3000 XR 90W** in manual transmission shifts:

- Meets API GL-5, API GL-4+ and API GL-4 performance levels.
- Provides long-lasting oil usage.
- Provides oxidation and thermal stability.
- Provides excellent protection against friction for enhanced grip strength.
- It provides easy gear shifts at first start, in cold conditions of transmission temperature.
- Gear shifts are smooth.
- Korozyon ve köpük önleyicidir.

Suggestions

Doill GEARPLUS AXLE 1000 XR 90W, an only be mixed with liquids of similar properties Replace the product with professional assistance. Before using the product, refer to the vehicle owner's manual. You can contact Doill for detailed information about the use of the product.

Features and Specifications

Density, @ 15 °C, g/cm ³ , ASTM D4052	0.868
Kinematic Viskosity @ 100 °C, mm ² /s, ASTM D445	22
Kinematic Viskosity @ 40 °C, mm ² /s, ASTM D445	167
Viscosity Index, ASTM D2270	158
Color, Apparance, ASTM D1500	Yellow
Flash Point, °C, Cleveland Açık Kap, ASTM D 92	225
Pour Point, °C, ASTM D 97	- 42

Features and Specifications


GEARMAX
AXLE 3000 XR **80W/90**

GEARMAX SERIES


Aşağıdaki performans seviyelerini karşılar veya geçer:

OEM GROUP	SPESIFICATION
SAE	80W-90
API	GL5 / GL4
ZF	ZF TE-ML 05A, 12E, 16B, 17B, 19B, 21A


GEARMAX Üstün Yük Taşıma ve Aşınma Koruması Sağlar

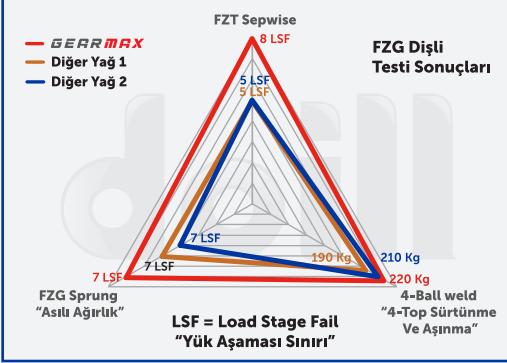


FZG Dört Kare Dişli Yağı Test Cihazı

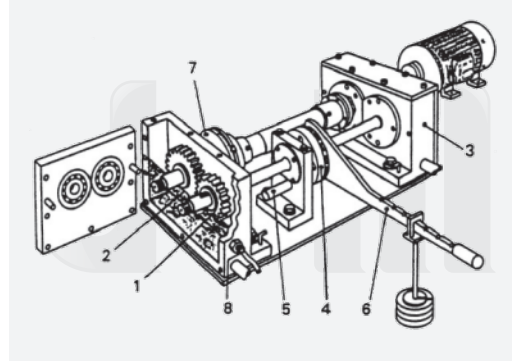

Manuel Transmisyon



1. Test Piyonu
2. Test Tekeri
3. Tahrik Dişli Kutusu
4. Döner Kaplin
5. Kilitleme Pini
6. Ağırlık İle Yük Kolu
7. Tork Göstergesi
8. Sıcaklık Sensörü



Mahruți Dişli

Doill GEARMAX SYN FH MULTI 80W/90

20 May 2020

Doill, the Doill logo and related marks are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information you can call +90 850 302 41 40

Lubricant Is Our Business

Contact Us: +90 850 302 41 40

www.doill.com.tr

e-mail: info@doill.com.tr

doill

Doğan Boya Makine ve Kimya Sanayi LTD. ŞTİ.
Tüm Hakları Saklıdır.