



# ORGANIC LONGLIFE -55 °C

## Doill -55 Ready Antifreeze

### Organic / G12

### Does Not Contain Nitrite / Amine / Phosphate

### Usage

**Doill ORGANIC LONGLIFE ANTIFREEZE -55 °C** It is an antifreeze containing mono ethylene glycol, blended with inorganic mixture additive technology, prepared by mixing with coolant and soft water, ready for use at -55 degrees. This product can be mixed with all mono ethylene glycol based inorganic coolants. Recommended for all cooling systems. For passenger cars, heavy-duty, construction and agricultural vehicles, gardening, ships, stationary engines and other industrial applications.

### Performance

**Doill ORGANIC LONGLIFE ANTIFREEZE -55 °C** Performances provided by inorganic antifreeze containing Mono Ethylene Glycol (MEG) in your vehicle:

- Provides ultra protection against corrosion by metals and minerals that give hardness to water and come with water.
- It extends the life of the engine and cooling system by providing protection against heat.
- Provides superior protection against corrosion of alloys used in vehicle cooling systems.
- Provides compatibility with traditional gasket and hose materials used in engine cooling systems.
- Provides protection against cavitation corrosion.
- Provides efficient lubrication of water pumps.

### Terms of Use

This product is a ready-mix product, you do not need to add additional water. Mix with water according to the recommended freezing point temperature protection, if possible with pure water, please see the table for the relevant proportions. To protect against corrosion, do not dilute the water content in antifreeze below a maximum of 33%. Water for dilution: Use pure water if possible. Maximum hardness occurs at 35°F, with chlorides and sulfates having a maximum content of 50 ppm. Change Frequency according to manufacturers recommendations.

**Attention,** only drain or check antifreeze when the engine is cold. Never mix it with drinking water, it is poisonous. Pay attention to what is written in the user manual.

### Recommendation


- **Doill ANTIFREEZE ORGANIC LONG LIFE**, It can only be mixed with products with similar features.
- Replace the product by getting professional support.
- Before using the product, refer to the vehicle user manual.
- You can contact Doill for detailed information about product usage.

Meets or exceeds the following performance levels:				
AUDI, SEAT, SKODA, PORSCHE VW	DEUTZ (DQC CB-14)	GE Jenbacher TA 1000-0201	RENAULT 41-01-001/S Type D	ASTM D 4985
VW TL 774 D/F/G (G12/G12+/G12++)	MAN (MAN 324 SNF)	MWM 2091/11	SAAB	ASTM D 6210
BUGATTI	MB 325.3	CAT 2091/11	LEYLAND TRUCKS	BS 6580
LAMBORGHINI	MINI COOPER D AFTER 2007-2010	KOMATSU 07 892 (2009)	SCANIA	JASO M 325
DAF (MAT74002)	FORD WSS-M97B44	LIEBHERR MD1-36-130	WARTSILLA 32-9011	JIS K 2234
MAZDA MEZ MN 121 D	GM 6277M	MTU MTL 5048	AFNOR NFR 15-601	SAE J1034
JAGUAR LAND-ROVER STJLR 651.5003	GMW 3420	YANMAR	ASTM D 3306	NATO S-759
BENTLEY	PACCAR DAF 74002	CUMMINS IS series u N14	ASTM D 4656	

## Features and Specifications

**ANTIFREEZE**  
**ORGANIC LONG LIFE**  
**-55 °C**  
**COOLANT ETZ**

ANTIFRIZ

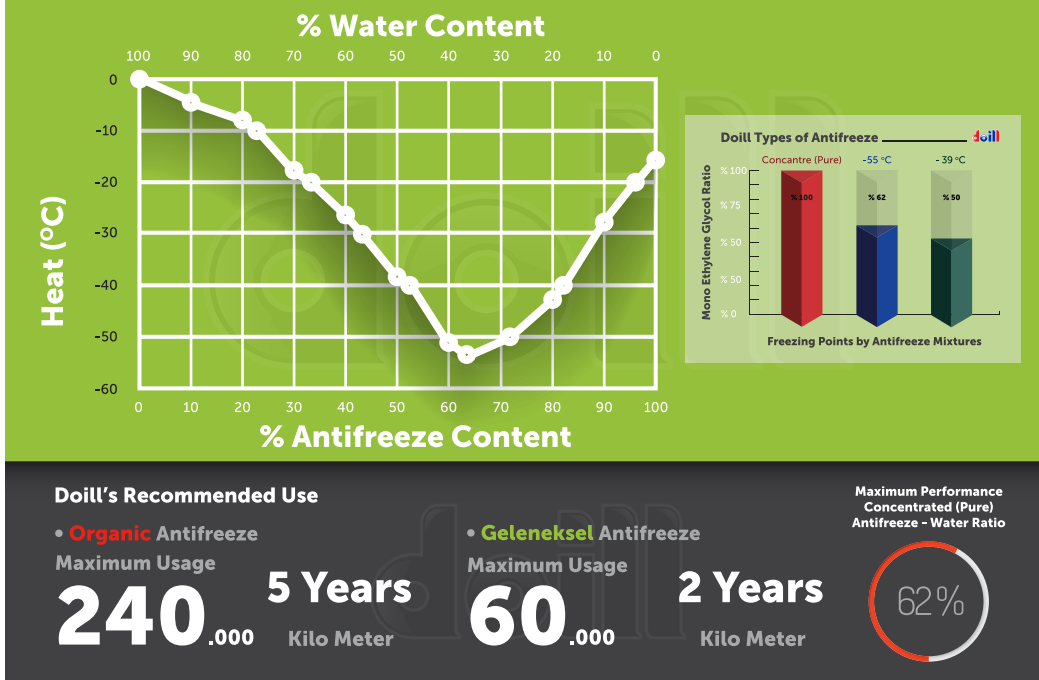

## Features and Specifications

Appearance, Visual	Kırmızı
Pour Point 50% solution, °C, ASTM D3321	- 22
pH, Aqueous Solution(100%), pH, ASTM D1287	8.5
Water Content, % wt, ASTM D1123	Max 38
Boiling Point, °C, ASTM D1120	115
Flash Point, COC, °C, ISO 2592	>120
Density @ 20 °C, g/cm <sup>3</sup> , ASTM D4052	1.1095
Hidden Alkalinity, ml 0.1N HCl, ASTM D1121	1-4

ORGANIC LONGLIFE -55

February 19, 2021

Doill, the Doill logo and related brands are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains are believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. The data provided is based on standard testing under laboratory conditions and is provided as a guide only. Users are advised to ensure that they consult the latest version of this datasheet. It is the user's responsibility to evaluate and use products safely, to assess suitability for intended application, and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe use and disposal of the product. No liability is accepted for any damage or injury resulting from abnormal use of the material, failure to comply with recommendations or inherent hazards of the material. All products, services and information provided are provided under our standard terms of sale. For more information, you can call +90 850 302 41 40.

## Lubricant Is Our Business

Contact Us: +90 850 302 41 40

[www.doill.com.tr](http://www.doill.com.tr)

e-mail: [info@doill.com.tr](mailto:info@doill.com.tr)

**doill**

Doğan Boya Makine ve Kimya Sanayi LTD. ŞTİ.  
All rights reserved.