

EXTREME PLUS+ 508/509 0W/20

API SP, ACEA C5

Doill Automobile - Vehicle Oil

Motor Oil

Fully-Synthetic

Usage

Doill EXTREME PLUS+ 508/509 0W/20 is a longlife PAO-based engine oil formulation with a universal applicability in gasoline and diesel engines for specific Volkswagen, Audi, Skoda, Seat vehicles requiring the VW 508.00/509.00 specification. It is developed to prolong the life and maintain the efficiency of emission systems. It is also designed to provide outstanding engine cleanliness, wear protection and strong durability to keep your engine running like new. A substantial fuel saving is reached through the use of the ultra low 0W20 viscosity grade.

Doill EXTREME PLUS+ 508/509 0W/20 meets the requirement of VW 508.00/509.00 specification, along with the first fill specification VW TL 52577. **Doill EXTREME PLUS+ 508/509 0W/20** is recommended for the new EA888 Gen III 2.0 TFSI 140 KW, VW 1.5 TSI 96 KW/110KW and EA897 Gen I 3.0 TDI CR 160 KW Volkswagen/Audi engines. The shelf life is 5 years from the date of production.


Performance

Doill EXTREME PLUS+ 508/509 0W/20 fully synthetic motor oil, the performances it provides in your vehicle:

- Independently tested to the highest standards.
- The most performance oil produced by Doill.
- Provides LSPI protection performance for TGDI engine.
- Suitable for vehicles equipped with Mid SAPS and GPF or DPF.
- Provides outstanding performance in fuel economy.
- Recommended by the world's leading automobile manufacturers.
- Thanks to Titanium Gold Technology, it makes a superior film on surfaces.
- Protects the engine throughout the entire discharge range, even under extreme pressure.
- Offers proven performance in a variety of driving conditions and temperatures.
- Compressor provides efficiency.
- With its full synthetic structure, it provides full lubrication at the first start, even in the coldest conditions.
- Thanks to its high TBN value, it makes your engine ultra clean.
- Extends the life of worn out engines.
- Poly Alpha Olefin (PAO) Based.

Recommendation

- **Doill EXTREME PLUS+ 508/509 0W/20** can only be mixed with similar products
- Replace the product with professional support
- Before using the product, refer to the vehicle user manual.
- You can contact Doill for detailed information on product usage.



Meets or exceeds the following performance levels:

PERFORMANCE LEVEL

- ACEA C5, C6
- API SP, API SN PLUS
- VW 508.00 / 509.00
- Porsche C20
- Ford WSS-M2C956-A1



1 L | T244692327
4 L | T244692334
5 L | T244692351
208 L | T244692358



EXTREME


Plus+ 508/509
ESP FORMULATION

0W/20


C5

EXTREME SERIES


API SN PLUS PERFORMANCE LEVELS

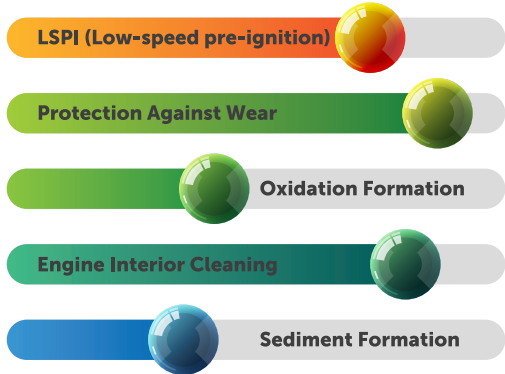

EXTREME
ESP FORMULATION

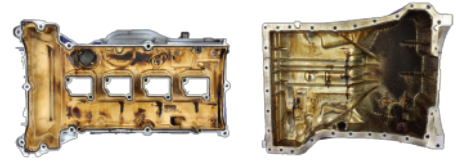

Others

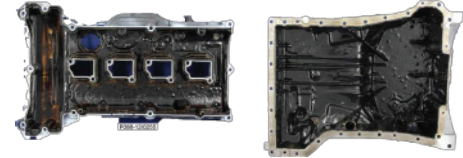

Features and Specifications

Colour	Green
Viscosity Grade, SAE	0W/20
Kinamtic Viscosity @ 100 °C, mm ² /s, ASTM D445	8.4
Kinamtic Viscosity @ 40 °C, mm ² /s, ASTM D445	45.1
Viscosity Index, ASTM D2270	165
Pour Point, °C,ASTM D97	-45
Sulfated ash, Weight %, ASTM D874	0.7
Poshphorus, Weight %, ASTM D4951	0.07
HTHS Viscosity @ 150 °C 1x10(6) sec(-1), Sheared, mPa.s, ASTM D4683	2.7
Total Base Number, mgKOH/g, ASTM D2896	8.1
Density @ 15 °C, g/cm ³ , ASTM D4052	0.84

Doill EXTREME PLUS+ 508/509 0W/20

23 December 2020

Doill, the Doill logo and related marks are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information you can call +90 850 302 41 40

Lubricants Are Our Business

Contact Us: +90 850 302 41 40

www.doill.com.tr

e-mail: info@doill.com.tr



Doğan Boya Makine ve Kimya Sanayi LTD. ŞTİ.
All Rights Are Reserved.