



# ATF 320 DEXRON III

## DEXRON®-IIIH

### Doill Multi-Vehicle Automatic Transmission Oil

#### Transfer Case and Power Steering

#### Semi Synthetic

#### Usage

**Doill ATF 320 DEXRON III** for use in 2006 and earlier GM automatic transmissions where Dexron® (IID, IIIG and IIIH) or Mercon is required and Ford automatic transmissions from 2005 and earlier, Allison TES 389 and Allison TES 228 [C-4] transmissions is designed to. It can also be used in some power steering units and transmissions.

#### Performance

Advantages of **Doill ATF 320 DEXRON III** in Dexron/Mecron style automatic transmission shifts:

- Dexron IIIH performance level.
- Provides long-lasting oil usage.
- Provides oxidation and thermal stability.
- It is semi-synthetic.
- Provides excellent protection against friction for enhanced grip strength.
- Specially formulated for high temperature stability and resistance to oxidation, thereby preventing deposit formation and oil It extends the life of parts and oil by protecting against thickening.
- Its high viscosity index provides a wide range of applications for effective protection of transmissions and actuation of power steering units. Provides stable viscosity throughout the temperature range.
- Provides enhanced filming protection to extend gear shift life.
- It has been tested against all seasonal conditions.

#### Suggestions

**Doill ATF 320 DEXRON III** can be mixed with fluids of similar specifications, where Dexron III is required, Doill ATF 320 DEXRON III, Doill ATF LT71141 and Doill ATF DEXRON VI automatic transmission fluids, etc. Replace the product with professional assistance. Before using the product, refer to the vehicle owner's manual. You can contact Doill for detailed information about the use of the product.


#### Features and Specifications

Density @ 15 °C, g/cm <sup>3</sup> , ASTM D4052	0.85
Kinematic Viskosity @ 100 °C, mm <sup>2</sup> /s, ASTM D445	7,5
Kinematic Viskosity @ 40 °C, mm <sup>2</sup> /s, ASTM D445	36,6
Viscosity Index, ASTM D2270	178
Brookfield - 40 °C, (cP), ASTM D2983	17900
Colour, Apperance, ASTM D1500	Red
Flash Point, °C, Cleveland Açık Kap	217

### Doill ATF Dexron III

Meets or exceeds the following performance levels:

OEM GRUP	SPESİFİKASYON
ALISON	C4 TES-389, TES-228
ZF	ZF TE-ML 03D - 04D - 14A - 17 C
MERCEDES	MB-Approval 236.9 MB-Approval 236.5
VOLVO	97341
FORD	FORD MERCON M931220
OPEL / GM	DEXRON III
MAN	MAN 339 Typ Z1 MAN 339 Typ V1 MAN 339 Typ L1
VOITH	Voith H55.6335.xx
DEXRON	Dexron® IIIH
CATERPILLAR	Caterpillar TO-2

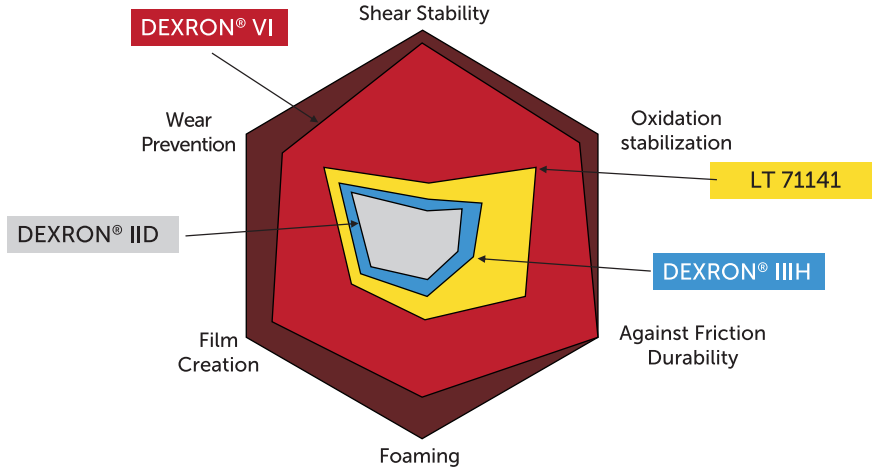

1 L | T244690651  
3 L | T244690658  
20 L | T244690750  
208 L | T244691368

Doill ATF DEXRON III  
25 May 2020

Doill, the Doill logo and related marks are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information you can call +90 850 302 41 40

Lubricants Are Our Business

Contact Us: +90 850 302 41 40

www.doill.com.tr

e-mail: info@doill.com.tr