



ATF LT 71141

Doill Multi-Vehicle Automatic Transmission Oil

Transfer Case and Power Steering

Fully Synthetic

Usage

Doill ATF LT 71141 is a full range automatic engine center for automatic vehicles with high oil reduction performance. It can solve the gear shifting problems in automatic systems and provides a longer service life. It is especially recommended for automatic and fully automatic bus passengers, passenger cars and buses. Suitable for complex fleets of Voith, Color ZF, Allison type as well as Leyland Pneumocycle and Hydracyclic units. With the product to be specially designed and the new additive, the production stage performance is an ATF. It provides particularly extended lubrication intervals. **Meets or exceeds ATF LT 71141 required. performance level.**

Performance

Advantages of **Doill ATF LT 71141** in Dexron/Mecron style automatic transmission shifts:

- It is Fully Synthetic.
- It prevents the formation of soot and prolongs the transmission life.
- Provides long-lasting oil usage.
- Provides oxidation and thermal stability.
- It provides fuel economy in automatic transmission vehicles by reducing the gear friction of the outer ring.
- Provides excellent protection against friction for enhanced grip strength.
- Specially formulated for high temperature stability and resistance to oxidation, thereby preventing deposit formation and oil. It extends the life of parts and oil by protecting against thickening.
- Its high viscosity index provides a wide range of applications for effective protection of transmissions and actuation of power steering units. Provides stable viscosity throughout the temperature range.
- Provides enhanced filming protection to extend gear shift life.
- It has been tested against all seasonal conditions.

Suggestions

Doill ATF LT 71141 can be mixed with fluids of similar specifications, where Dexron III is required, Doill ATF 320 DEXRON III, Doill ATF LT71141 and Doill ATF DEXRON VI automatic transmission fluids, etc. Replace the product with professional assistance. Before using the product, refer to the vehicle owner's manual. You can contact Doill for detailed information about the use of the product.

Features and Specifications

Density @ 15 °C, g/cm ³ , ASTM D4052	0.855
Kinematic Viscosity @ 100 °C, mm ² /s, ASTM D445	7.4
Kinematic Viscosity @ 40 °C, mm ² /s, ASTM D445	37.2
Viscosity Index, ASTM D2270	168
Brookfield - 40 °C (cP)	11250
Color and Appearance	Yellow


ATF LT71141

Doill ATF LT71141

Meets or exceeds the following performance levels:

OEM GRUP	SPECIFICATION	OEM GRUP	SPECIFICATION
ALISON	C4 TES-389B	DAEWOO	LT 71141
ZF	TE-ML 25C - 21L - 20 C - 17C - 16S - 16M - 14C - 14B - 11B - 09 - 05L - 04D - 03D Lifeguard 5, # S671 090 170 Lifeguard 6, # S671 090 255 All 3 & 4 Speed Transmission	HYUNDAI / KIA	Dex-II/ SP-II/ SP-III / SP-IV
JASO	JASO 1A	JEEP	ATF+3
MERCEDES	MB-Approval 236.81 MB-Approval 236.11	DAIHATSU	AMMIX ATF D-III Multi D3-SP
BMW	ETL7045E - ETL8072B - ZF 5HP18FL, 5HP24, 5HP30 - LT71141 (ZF 5 HP 18FL/19FL/24A) - LA2634	SUBARU	F6 - Red - KO410Y0700 ATF HP - SKU: SOA868V9241
AUDI / VW	Audi G 052 162-A1/A2/A6 (ZF Lifeguardfluid 5) Audi 5 HP LT71141 (ZF 5 HP 18FL/19FL/24A) VW TL 52162 - VW 50160 G 052 025-A2 - G 052 990 A2 G 055 025 A2, G 055 005 A1 / A2 / A6 G US 000 162	AUDI / VW	(B71 2294 & B71 2300)
CHRYSLER	ATF+, +2, +3 (MS 7176E) Dodge/Jeep 05127382AA	MITSUBISHI	P II,IIM, III, PA, J3, SP IV
RENAULT	Elfmatic J6 - Matic D2, D3 DPO/AL4	SUZUKI	AT Oil 5D06 - 2384K JWS 3314 - JWS 3317
PORCHE	Z 000169756 - 999 917 547 00 (A2), 000 043 205 09 - ATF 3403-M115, ZF 5HP19FL, ZF 5HP20, LT71141	HONDA / ACURA	DW 1/Z 1 ATF Z1 (except CVTs)
TOYOTA	ATF (D-III - WS - Type T, Type T-II - Type T-III - Type T-IV) JWS 2312D - JWS 3309 - JWS 3324, LF 08886-81015, # 08886-00405	ISUZU	(where Toyota T-IV is required)
VOLVO	97342 - 1161521 - 1161540 - CE 97340 - 97335 - 97325	DAIMLER	ATF +3, ATF +4
OPEL / GM	88900925 - 22 17466 - 21005966 - 1940773 - 1940771 1940700 - 19 40 767 - 19256039 - P/N 88861950 - P/N 88861951 - TASA DEXRON® - IIIH - IIIG - IIE - IID - II -	NISSAN / INFINITI	ATF FMS - MATIC S - MATIC D MATIC-J - MATIC K - MATIC W
FORD	ESP-M2C166H, XL-12 XT-2-QSM (Syn) - XT-2-QDX (M) WSS M2C 138CJ, 166H MERCON®	LAND ROVER	M1375.4 - TYK500050 STC 4863
JAGUAR	JLM 20292 - ATF 3403 JLM20238 - ATF LT71141 ZF 5HP24	BENTLEY	PY112995PA
FIAT	9.55550-AV1, 9.55550-AV2, 9.55550-AV4	ROLLS ROYCE	PL 31493PA
GM	21005966 - 1940700 DEXRON® - IIIH - IIIG - IIE - IID - II - TASA	MASERATI	231603
FORD	ESP-M2C166H, XL-12 XT-2-QSM (Syn) - XT-2-QDX (M) WSS M2C 138CJ, 166H MERCON®	MINI	ASW 3309 83 22 0 402 413
PEUGEOT / CITROEN	Automobiles B71 2340 (PSA) AL4 Automatic gearbox oil (#9730 AE - 9730 AC - 9735 EJ) JWS 3309 - Z 000169756	SATURN	T-IV - 22686186
MAZDA	ATF F-1 - ATF M-III - ATF M V - JWS 3317 - FZ - ATF D-II	SAAB	JWS 3309 - 93 165 147
OTHER	Voith H55.6336.xx American Motors ATF +3 (MS7176-E) Bosch TE-ML 09 CAT TO-2 Esso LT 71141 JEEP ATF+3 NAG 1 (Chrysler, Jeep, Cherokee) Vickers M2950-S, I-286-S Aisin Transmissions requiring JWS 3309 MAN 339 Typ Z3, MAN 339 Typ Z12, MAN 339 Typ V2, Aisin Warner JWS 3309, JWS 2312D, CLIP, FF ATF, AW-F21 Jatco JF613E		

ATF LT 71141 Dexron Oil Groups Covered

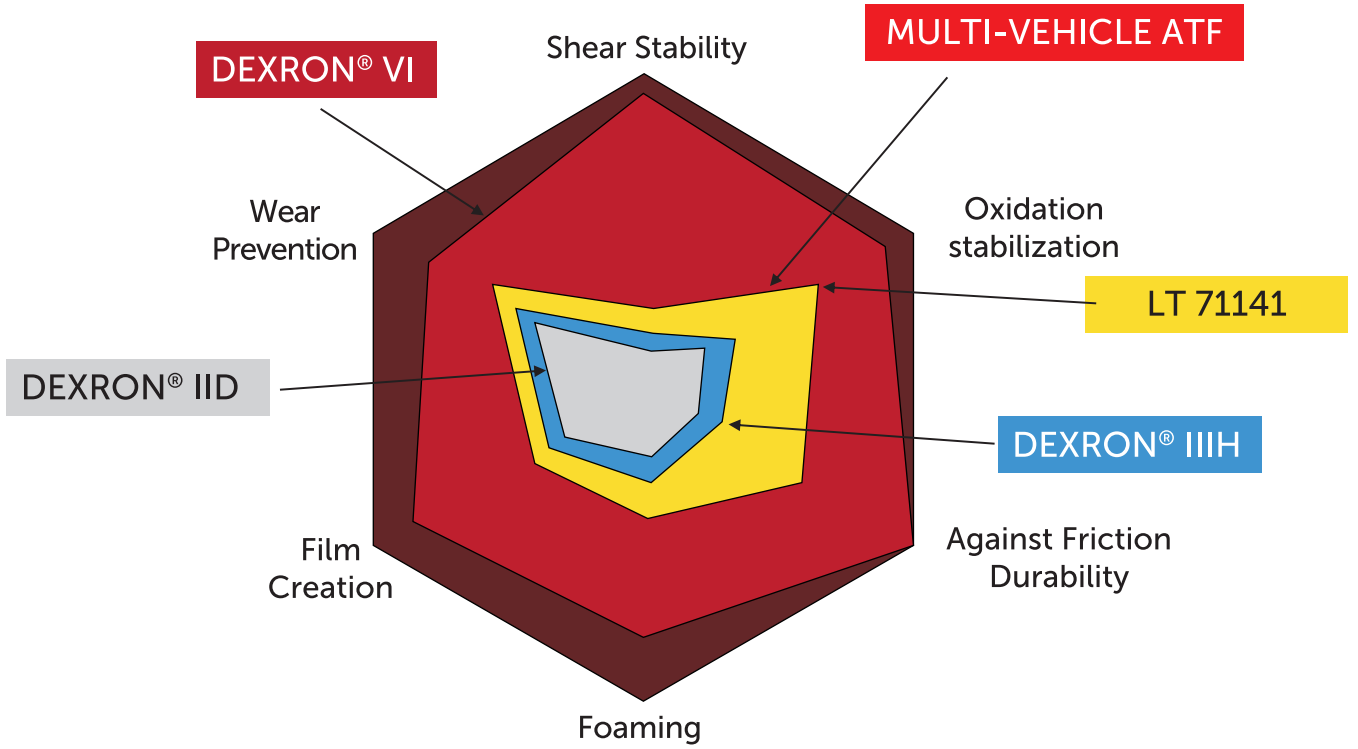

CAUTION !!! - Never Use or Mix the Following Products Instead of

- **(CVT)** Continuously Variable Transmission
- **Dual Clutch**
- ATF Dexron VI
- ATF MB 236.15, ATF MB 236.17
- LIFE KEEPER 8 HP

1 L | T244690634
3 L | T244692921
20 L | T244691077
208 L | T244691299

Doill ATF LT 71141
14 June 2020

Doill, the Doill logo and related marks are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information you can call +90 850 302 41 40

Lubricants Are Our Business

Contact Us: +90 850 302 41 40

www.doill.com.tr

e-mail: info@doill.com.tr

doill

Doğan Boya Makine ve Kimya Sanayi LTD. ŞTİ.
All Rights Are Reserved.