



TRANCEMAX
FULLY SYNTHETIC CVT

NS-2 Green

Doill > Doill TRANCEMAX CVT NS-2 GREEN TDS > English

ATF TRANCEMAX CVT NS-2 GREEN

Automatic Transmission Oil

Transfer Case and Power Steering

Fully Synthetic

Usage

Doill TRANCEMAX CVT NS-2 GREEN is a transmission fluid produced as a fully synthetic oil, especially for use in continuously variable transmissions (CVT) of Japanese passenger cars. **Doill TRANCEMAX CVT NS-2 GREEN** is suitable for most passenger vehicles equipped with modern push belt and chain CVT systems. It meets requirement of Nissan's NS-2 specifications, offering outstanding protection against friction, wear and foam building, as well as improved anti-shudder durability. **Doill TRANCEMAX CVT NS-2 GREEN** is NOT suitable for hybrid E-CVT and toroidal CVT gearboxes. **Doill TRANCEMAX CVT NS-2 GREEN** provides higher torque capacity, protection against wear, longer oil performance and provides comfortable driving for longer periods of time for drivers.

Performance

Doill TRANCEMAX CVT NS-2 GREEN the advantages of synthetic oil in automatic transmission transitions:

- It has higher torque capacity.
- Provides wear protection at the interfaces of the pulleys of the drive gears.
- Superior operational efficiency is achieved by reducing the risk of loss in belts.
- Enhanced oxidation stability thanks to excellent viscosity control.
- Provides maintenance of friction profile for vibration resistant
- Prevents corrosion at metal-to-metal contact points in transmission system parts, especially belts and pulleys.
- Provides strong oil film and good shear stability and maintains oil pressure in the CVT system.
- Provides excellent thermal and oxidation stability.

Suggestions

Doill TRANCEMAX CVT NS-2 GREEN, an only be mixed with liquids of similar properties Replace the product with professional assistance. Before using the product, refer to the vehicle owner's manual. You can contact Doill for detailed information about the use of the product.




Features and Specifications

Density @ 15 °C, g/cm ³ , ASTM D4052	0.845
Kinematic Viscosity @ 100 °C, mm ² /s, ASTM D445	7.35
Kinematic Viscosity @ 40 °C, mm ² /s, ASTM D445	36
Vicosity Index, ASTM D2270	175
Brookfield - 40 °C (cP), ASTM D2983	15678
Color, Apprance, ASTM D1500	Green
Akma Noktsasi, °C, ASTM D97	-42

Doill TRANCEMAX NS-2 GREEN CVT

Meets or exceeds the following performance levels:

OEM GROUP	SPECIFICATION
NISSAN	Nissan CVT NS-2, Nissan KLE52-0002, Nissan KLE52-0004
MITSUBISHI	Mitsubishi S0001401
PEUGEOT	PSA 9735EF
SUZUKI	Suzuki CVT Fluid Green1 99000-22B15-046

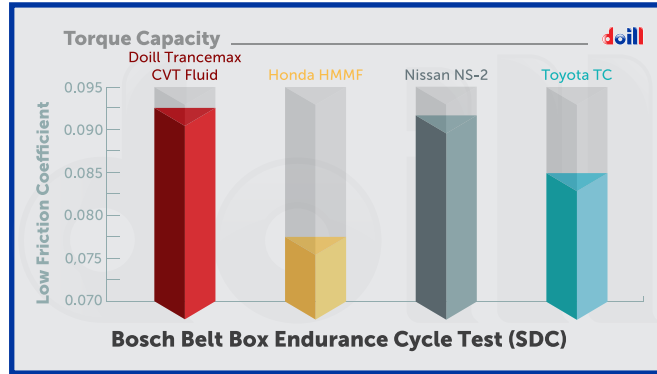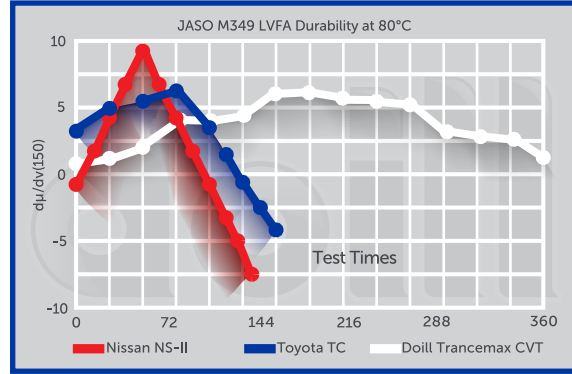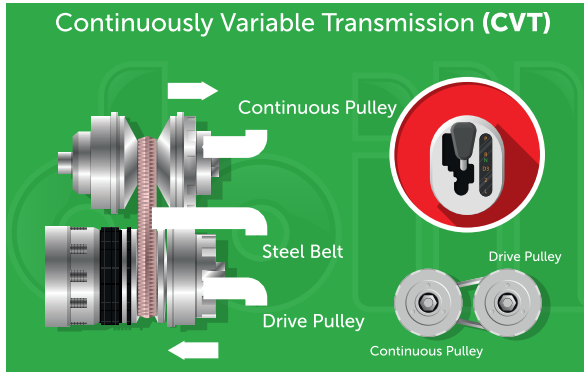

Recommended for CVT Transmission Applications of the Following Brands;

- TOYOTA
- NISSAN
- HONDA
- MITSUBISHI

Hybrid E-CVT and Toroidal CVT not recommended

1 L | T244692333
 4 L | T244692340
 20 L | T244692357
 208 L | T244692364

Doill TRANCEMAX CVT NS-2 GREEN Fluid
 30 July 2020

Doill, the Doill logo and related marks are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information you can call +90 850 302 41 40

Lubricants Are Our Business

Contact Us: +90 850 302 41 40

www.doill.com.tr

e-mail: info@doill.com.tr