

MASTER xp5000 5W/30

API SN/CF ACEA A3/B4

Doill Automobile - Vehicle Oil

Motor Oil

Fully Synthetic

Usage

Doill MASTER xp5000 5W/30 is a fully synthetic engine oil especially designed for low viscosity and high performance diesel, gasoline, LPG and bio-diesel engines. In addition, the FORD WSS M2C 913 D standard fully covers the previous FORD WSS M2C 913 A, 913 B and 913 C specifications.

Doill MASTER xp5000 5W/30 provides the following features and benefits:

- With its excellent oxidation stability, it reduces the formation of deposits and residues in the engine and helps the internal cleaning of the engine.
- It provides excellent protection against abrasion even in all driving conditions with its compatibility to high and low temperature conditions.
- It provides superior protection against abrasion during the first operation in harsh cold weather.
- **Doill MASTER xp5000 5W/30** saves up to 10% fuel for starting and short trips in the city (compared to 15W/40 reference oil)
- Suitable for STOP-START vehicles.

Performance

Doill MASTER xp5000 5W/30 fully synthetic motor oil, the performances it provides in your vehicle:

- It has a high TBN value.
- Suitable for new technology gasoline or diesel engines that require fuel economy priority (ACEA A1 / B1 or ACEA A5 / B5 standards) engine oil with catalytic converter or diesel particulate filter (DPF)
- It helps to prevent soot effectively.
- It is used in passenger cars, SUVs (sports utility vehicles), light commercial vehicles and pickup trucks.
- Shows good engine cleaning performance.
- Provides strong protection against abrasion.
- Prevents high temperature viscosity loss.
- Can be used on relatively old engine technologies.
- Compatible for Gasoline, Diesel and LPG.
- It is an ideal engine oil for highway driving and stop-and-go city driving.

Recommendation

- **Doill MASTER xp5000 5W/30** can only be mixed with similar products
- Replace the product with professional support
- Before using the product, refer to the vehicle user manual.
- You can contact Doill for detailed information on product usage.

Meets or exceeds the following performance levels:

PERFORMANCE LEVEL

- API SN
- ACEA A1/B1 - A5/B5
- RN 0700
- Ford WSS-M2C 913-D
- Jaguar Land Rover STJLR.03.5003




**SAE 5W/30
MOTOR OIL**

1 L | T244690688
4 L | T244690695
5 L | T244692037
7 L | T244690436
10,5 L | T244691931
208 L | T244691412

MASTER_{xp}5000 5W/30

MASTER SERIES

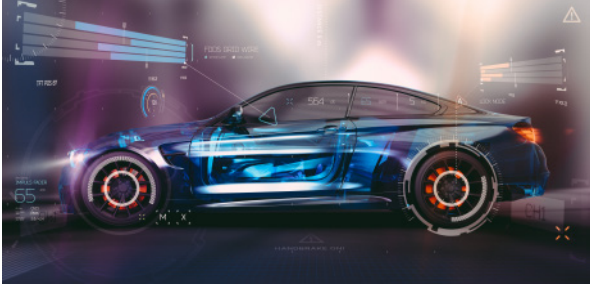

Features and Specifications

Viscosity Grade, SAE	5W/30
Kinematic Viscosity @ 100 °C, mm ² /s, ASTM D445	10,9
Kinematic Viscosity @ 40 °C, mm ² /s, ASTM D445	64.7
Viscosity Index, ASTM D2270	161
Pour Point, °C, ASTM D97	-39
Flash Point, °C, ASTM D92	225
Density @ 15 °C, g/cm ³ , ASTM D4052	0,85

Doill MASTER xp5000 5W/30
01 December 2021

Doill, the Doill logo and related marks are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe handling, and disposal of the product. No responsibility is taken by for any damage or injury resulting from abnormal use of the material, from any failure to adhere to recommendations, or from hazards inherent in the nature of the material. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information you can call +90 850 302 41 40

Lubricants Are Our Business

Contact Us: +90 850 302 41 40

www.doill.com.tr

e-mail: info@doill.com.tr

doill

Doğan Boya Makine ve Kimya Sanayi LTD. ŞTİ.
All Rights Are Reserved.