



# FLUORECENT YELLOW RX-TYPE D

## Doill Concantre Antifreeze

### Organic

### Does Not Containe Nitrite / Amine / Phospate

### Usage

**Doill FLUORECENT YELLOW RX-TYPE D** is a fluorecent yellow colour, long life cooling liquid, based on monoethyleneglycol, using organic additives (**OAT** – Organic Aditive Technology). Specifically developed for all liquid cooling systems of RENAULT Group passenger cars (Renault, Dacia and Samsung) when coolant meeting requirements of **Renault Glaceol Type D** standard is required. Do not mix with non-organic products.

### Performance

**Doill FLUORECENT YELLOW RX-TYPE D** Performances provided by inorganic antifreeze containing Mono Ethylene Glycol (MEG) in your vehicle:

- Provides ultra protection against corrosion by metals and minerals that give hardness to water and come with water.
- It extends the life of the engine and cooling system by providing protection against heat.
- Provides superior protection against corrosion of alloys used in vehicle cooling systems.
- Provides compatibility with traditional gasket and hose materials used in engine cooling systems.
- Provides protection against cavitation corrosion.
- Provides efficient lubrication of water pumps.

### Terms of Use

Never use the product pure, antifreeze is used by mixing it with water. Mix with water according to the recommended freezing point temperature protection, if possible with pure water, please see the table for the relevant proportions. To protect against corrosion, do not dilute the water content in antifreeze below a maximum of 33%. Water for dilution: Use pure water if possible. Maximum hardness occurs at 35°F, with chlorides and sulfates having a maximum content of 50 ppm. Change Frequency according to manufacturers recommendations.

**Attention,** only drain or check antifreeze when the engine is cold. Never mix it with drinking water, it is poisonous. Pay attention to what is written in the user manual.

### Recommendation

- **Doill FLUORECENT YELLOW RX-TYPE D**, It can only be mixed with products with similar features.
- Replace the product by getting professional support.
- Before using the product, refer to the vehicle user manual.
- You can contact Doill for detailed information about product usage.

Meets or exceeds the following performance levels:


- Renault Glaceol RX type D
- Renault Type D

## Features and Specifications

**ANTIFREEZE**  
**FLUORECENT**  
**YELLOW**  
**CONCENTRATED**  
**RX-TYPE D**

3 L | T244690780  
16 Kg | T244690378  
200 Kg | T244690764

ANTIFREEZE

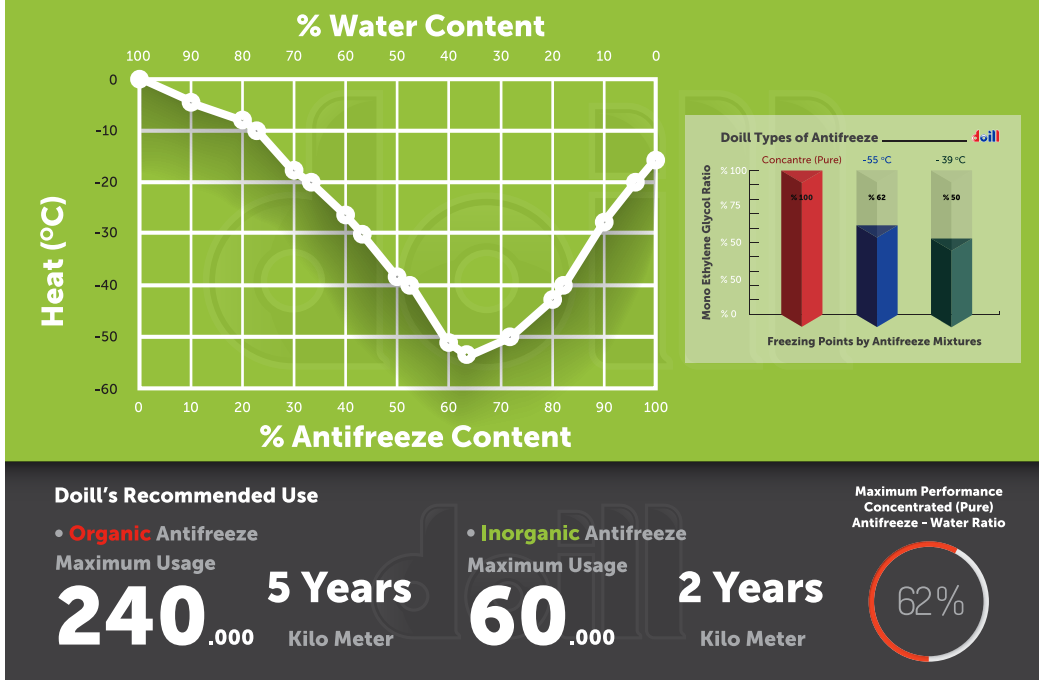

## Features and Specifications

Appearance, Visual	Fluorecent Yellow
Pour Point 50% solution, °C, ASTM D3321	- 37
pH, Aqueous Solution(100%), pH, ASTM D1287	8.5
Water Content, % wt, ASTM D1123	Max 5
Boiling Point, °C, ASTM D1120	175
Flash Point, COC, °C, ISO 2592	>120
Density @ 20 °C, g/cm <sup>3</sup> , ASTM D4052	1.113
Hidden Alkalinity, ml 0.1N HCl, ASTM D1121	2-5

FLUORECENT YELLOW RX TYPE D ANTIFREEZE  
February 17, 2021

Doill, the Doill logo and related brands are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This datasheet and information is believed to be accurate as of its basic date. However, no warranty or representation, express or implied, is made regarding its content or completeness. The data provided is comprehensive and includes information on standard tests under laboratory conditions. Users are advised to ensure that they refer to the latest version of this data. Students are responsible for the safe evaluation and use of products, their intended application, validity values and compliance with all applicable laws and rules. Material Safety Data Sheets are available for all products and should be consulted for appropriate information regarding product parts, safe use and disposal. No liability is accepted for any damage or injury resulting from abnormal use of the material, failure to comply with recommendations or inherent hazards arising from the material. All products, services and information provided are offered under our standard terms of sale. For more information you can call +90 850 302 41 40.

**Lubricants Are Our Business**

Contact Us: +90 850 302 41 40

[www.doill.com.tr](http://www.doill.com.tr)

e-mail: [info@doill.com.tr](mailto:info@doill.com.tr)

**doill**

Doğan Boya Makine ve Kimya Sanayi LTD. ŞTİ.  
All rights reserved.