



GREEN LIFE -55 ANTIFREEZE

Doill -55 °C Ready To Use Antifreeze

Inorganic / G11

Does Not Contain Nitrite / Amine / Phosphate

Kullanımı

Doill GREEN LIFE -55 ANTIFREEZE is a ready-to-use antifreeze containing monoethylene glycol, blended with inorganic additive technology, and prepared by mixing with soft water, designed for use at -55 degrees. This product can be mixed with all monoethylene glycol-based inorganic coolants. It is produced as an inorganic green coolant for all cooling systems: passenger cars, heavy-duty vehicles, construction and agricultural machinery, gardening equipment, ships, stationary engines, and other industrial applications. It meets the **G11** specification.

Performance

Doill GREEN LIFE -55 ANTIFREEZE Performances provided by inorganic antifreeze containing Mono Ethylene Glycol (MEG) in your vehicle:

- Provides ultra protection against corrosion by metals and minerals that give hardness to water and come with water.
- It extends the life of the engine and cooling system by providing protection against heat.
- Provides superior protection against corrosion of alloys used in vehicle cooling systems.
- Provides compatibility with traditional gasket and hose materials used in engine cooling systems.
- Provides protection against cavitation corrosion.
- Provides efficient lubrication of water pumps.

Terms of Use

This product is a ready-mix product, you do not need to add additional water. Mix with water according to the recommended freezing point temperature protection, if possible with pure water, please see the table for the relevant proportions. To protect against corrosion, do not dilute the water content in antifreeze below a maximum of 33%. Water for dilution: Use pure water if possible. Maximum hardness occurs at 35°F, with chlorides and sulfates having a maximum content of 50 ppm. Change Frequency according to manufacturers recommendations.

Attention, only drain or check antifreeze when the engine is cold. Never mix it with drinking water, it is poisonous. Pay attention to what is written in the user manual.

Recommendation

- **Doill GREEN LIFE -55 ANTIFREEZE**, It can only be mixed with products with similar features.
- Replace the product by getting professional support.
- Before using the product, refer to the vehicle user manual.
- You can contact Doill for detailed information about product usage.

Meets or exceeds the following performance levels:


- | | | |
|----------------------------|---|-------------------------|
| • ASTM D3306, D4985 | • MB DBL 7700.00, 325.0 | • BMW N600 69.0 |
| • SAE J 1034 | • MB DBL 7700.02 /Page 325.0 | • KHD H-LV 0161 0188 |
| • Renault 41-01-001 Type D | • MAN 324, Type NF | • Opel/General Motors B |
| • SAAB 6901599 | • Bundeswehr TL-6580-0038/1 | 040 0240 GM QL 130 100 |
| • Volvo 1286083 | • Scania TB 1451 | • Porsche TL-774 C |
| • MTU MTL5048 | • Rolls-Royce (After 1988) | • Audi TL-774 C |
| • KHD, BWB | • G11 | • Seat TL-774 C |
| TK-BA2-3-6850-008 | • Recommended for Asian brand vehicles: Hyundai / Kia | • VW TL-774 C |
| | | • Skoda TL-774 C |

Features and Specifications



1,5 L | T244692982

ANTIFREEZE

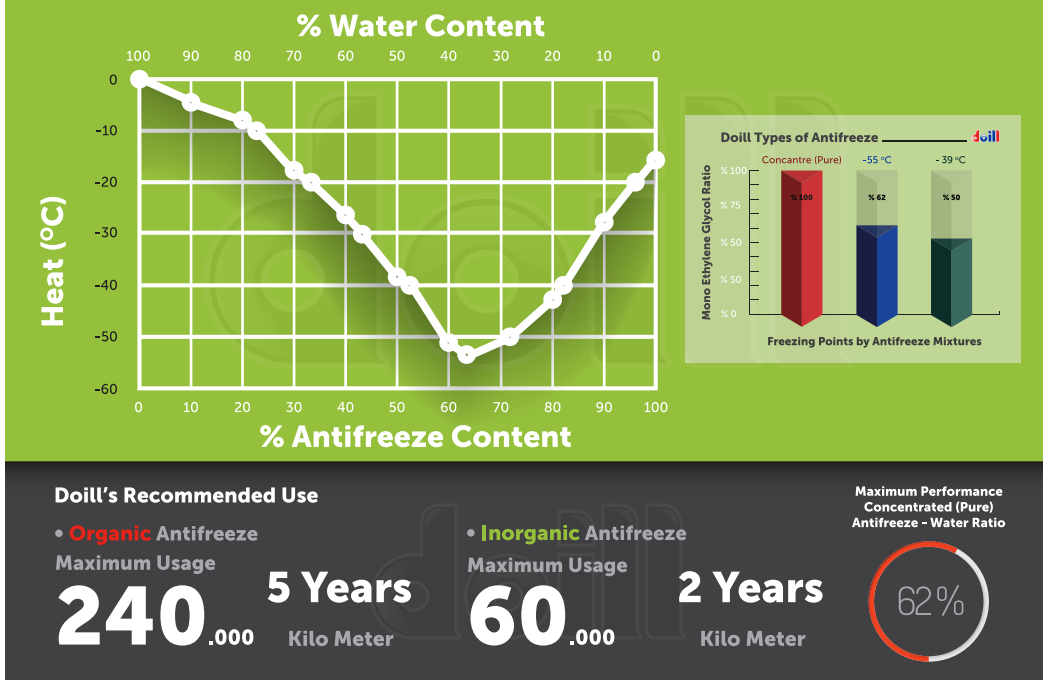

Features and Specifications

Görünüş, Görsel	Green
Donma Noktası %50'lik çözelti , °C, ASTM D3321	- 22
pH, Sulu Çözelti(50%), pH, ASTM D1287	8.5
Su Miktarı, % wt, ASTM D1123	Max 38
Kaynama Noktası, °C, ASTM D1120	115
Parlama Noktası, COC, °C, ISO 2592	>120
Yoğunluk @ 20 °C, g/cm ³ , ASTM D4052	1.1095
Saklı Alkalinite, ml 0.1N HCl, ASTM D1121	1-4

GREEN LIFE -55 ANTIFREEZE
February 18, 2021

Doill, the Doill logo and related brands are trademarks of Doğan Boya Makine Ve Kimya Sanayi Limited Şirketi, used under license.

This data sheet and the information it contains are believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. The data provided is based on standard testing under laboratory conditions and is provided as a guide only. Users are advised to ensure that they consult the latest version of this datasheet. It is the user's responsibility to evaluate and use products safely, to assess suitability for intended application, and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be consulted for appropriate information regarding storage, safe use and disposal of the product. No liability is accepted for any damage or injury resulting from abnormal use of the material, failure to comply with recommendations or inherent hazards of the material. All products, services and information provided are provided under our standard terms of sale. For more information, you can call +90 850 302 41 40.

Lubricants Are Our Business

Contact Us: +90 850 302 41 40

www.doill.com.tr

e-mail: info@doill.com.tr

doill

Doğan Boya Makine ve Kimya Sanayi LTD. ŞTİ.
All rights reserved.